

Ultra•Strip III Book Label

The Ultra•Strip III Book Label provides premier performance and merchandise protection for paperback and/or hardcover books. Intended for manual application, this widely used security label is applied to a book's spine or behind the dust jacket for inconspicuous protection. This application makes the label less prone to tampering or removal, helping to reduce lost sales due to theft.

Retailer Values

- // Utilizes proven Sensormatic AM technology and manufacturing process to provide the highest in detection performance
- // Provides superior protection while minimizing impact on product
- // Deactivates at impressive throughput speeds, expediting the check-out process

Product Code

ZLDRSLT5

Technology

AM

Environmental Constraints

Temperature

Maximum storage temperature not to exceed 50°C (122°F) for 96 hours at 80% RH.

Humidity

Unaffected by 80% humidity at 50°C (122°F), up to 96 hours.

Shelf Life

One year from date of manufacture when labels are stored between 15°C-32°C (60°F-90°F), 30-80% RH.

Product Compatibility

Sensormatic AM detection systems and deactivation devices.

Mode of Application

Hand

Materials of Construction

Plastic Substrate

Polystyrene/Polyethylene 0.3mm (0.012in) thickness

Magnetic Acoustic Resonator

Proprietary resonant magnetic material Amorphous alloy based on iron, containing nickel, cobalt, boron and silicon

Laminate

// Low Density Polyethylene/Polyester
0.127mm (0.0050in)

// Low Density Polyethylene/Polyester
0.114mm (0.0045in)

Bias

Proprietary semi-hard magnetic material containing iron, nickel and chromium

Adhesive

Double-coated, hot melt/ultra removable adhesive:

// 0.45 mil thick label side – hot melt

// 0.32mil thick release liner side – ultra removable

// Maximum peel adhesion is 0.142kg/5oz

Release Liner

// Double-sided, clay-coated supercalendered 22.68kg/50lb paper

Dimensions

Color Black

Length.....45.21mm ± 0.5mm
(1.78in ± 0.020in)

Width10.67mm ± 0.5mm
(0.420in ± 0.020in)

Label Thickness

(excluding liner)..... Maximum
1.89mm (0.074in)


(including liner)..... Maximum
2.00mm (0.079in)

Labels per Sheet.....54

Note: Warranty terms and condition are as specified in the applicable Sales Agreement.

CE The acousto-magnetic (AM) label is in conformity with RoHS II Directive 2011/65/EU and REACH Substances of Very High Concern as defined in Regulation (EC) No 1907/2006 and subsequent amendments to both.

See Sensormatic.com for Usage Instructions

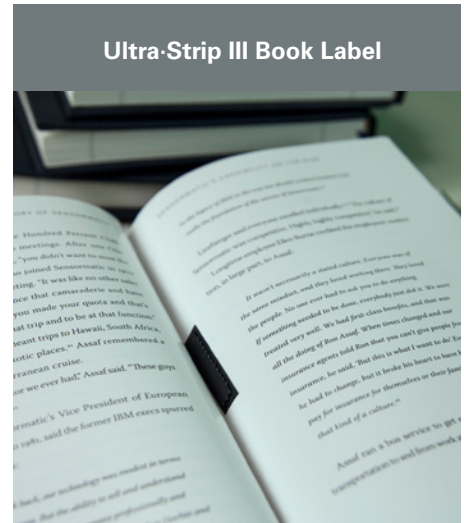

SHEET SPECIFICATIONS

	Sheet
PRODUCT CODE	ZLDRSLT5
Case Weight	2.76kg (6.07lbs) External Cubic Ft.
Per Case	0.166
Cases Per Pallet	160
Order Multiple	5,000-unit case